

# CONSTANT TEMPERATURE WATER BATH (+100°C)

## **LABEC** Constant Temperature Water Bath

is manufactured in Australia with high quality stainless steel for easy maintenance and excellent durability.

Using an internal element and submerged RTD sensor connected to a digital temperature control the temperature can be controlled to 0.1°C.

The baths are supplied with a perforated tray which covers the element and allows even circulation of the contents of the bath.


A digital display temperature controller controls the temperature within the range ambient +5°C to +100°C, when optioned the controller can be connected via RS232/RS458 communication ports which can be connected directly to a data logger or computer to collect this information. Software is available for programming and monitoring.

To suit your the range of baths options include gabled or flat lids in stainless steel or clear polycarbonate. A manual reset over temperature cutoff, programmable temperature controller and on/off timer can also be fitted. Refrigerated models also available.



### **OTHER STANDARD FEATURES INCLUDE:**

- RCD/ ELB (earth leakage breaker)
- Pt 100 ohms sensor fully sheathed
- Stainless Steel exterior and interior
- Excellent temperature uniformity
- Over Temperature Alarm Cut Off

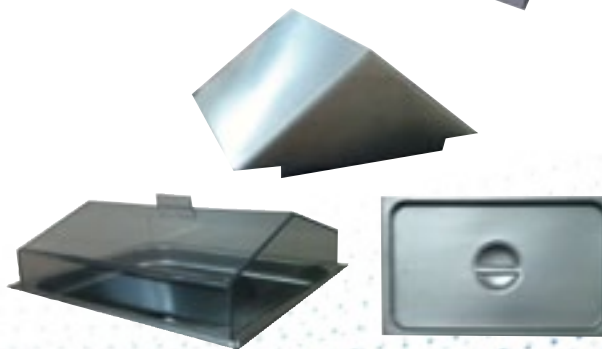

Serving the Scientific, Medical and Research industries since 1945

**LABEC**

**LABEC**

Laboratory Equipment Pty Ltd

Laboratory Equipment Pty Ltd

email: [sales@labec.com.au](mailto:sales@labec.com.au)

Ph: 02 9560 2811 • Fax: 02 9560 6131

[www.labec.com.au](http://www.labec.com.au)

## SPECIFICATIONS

# CONSTANT TEMPERATURE WATER BATH (+100 °C)

Model	NBCT2	NBCT5	NBCT7	NBCT9	NBCT11
Capacity (litres)	8	12	16	25	44
Int. Dim. (cm) L x W x D	30 x 23 x 12	30 x 23 x 17	32 x 30 x 17	50 x 30 x 17	59 x 49 x 17
Ext. Dim. (cm) L x W x D	40 x 37 x 27	40 x 37 x 27	40 x 38 x 27	67 x 38 x 27	75 x 52 x 27
Temp. Controller	Digital PID Controller				
Temp. Min	Ambient +5°C				
Temp. Max	100°C				
Temp. Setting Accuracy	0.1°C				
Temp. Fluctuation	+/- 0.2°C				
Temp. Sensor	Pt 100ohms				
Heating System	Electric Element				
Interior Material	Stainless Steel				
Exterior Material	Stainless Steel				
Options	Flat or gabled lift of lids in either stainless steel or polycarbonate, manual reset over heat cut off, top mounted stirrer, circulating pump, large capacity models, refrigerated models.				
Safety Features	Over temperature alarm, temperature protection cut off, earth leakage breaker (ELB).				
Power (W)	500	750	1200	2000	2400
Weight (kg)	10	15	20	22	33

Serving the Scientific, Medical and Research industries since 1945

**LABEC**

**LABEC**

Laboratory Equipment Pty Ltd

Laboratory Equipment Pty Ltd

email: [sales@labec.com.au](mailto:sales@labec.com.au)

Ph: 02 9560 2811 • Fax: 02 9560 6131

[www.labec.com.au](http://www.labec.com.au)